
Motion detector



EAN 4007841 006525 Article number 006525







Function description

The multi-talent for indoors and outdoors. Infrared wall sensor IS 360-3, ideal for mounting under soffits, in carports, on large building facades and driveways, 3 pyro sensors for a 360° angle of coverage, reach can be set up to 12 m, selectable time and twilight threshold, detection zone can be customised with shrouds.

Technical specifications

Dimensions (Ø x H)	121 x 57 mm	LED lamps < 2 W	100 W
Manufacturer's Warranty	3 years	LED lamps > 2 W < 8 W	300 W
Settings via	Potentiometers	LED lamps > 8 W	600 W
With remote control	No	Capacitive load in µF	176 μF
Version	black	Sensor Technology	Passive infrared
PU1, EAN	4007841006525	Mounting height	2,50 – 6,00 m
Туре	Motion detectors	Mounting height max.	6,00 m
Application, place	Outdoors, Indoors	Optimum mounting height	2,8 m
Application, room	outdoors, all round the building, Indoors	Detection angle	360 °
		Angle of aperture	90 °
Colour	black	Sneak-by guard	Yes
Colour, RAL	9005	Capability of masking out individual segments	Yes
Includes corner wall mount	No		
Installation site	ceiling	Electronic scalability	No
Installation	Surface wiring, Ceiling	Mechanical scalability	No
IP-rating	IP54	Reach, radial	Ø 6 m (28 m ²)
Protection class	II	Reach, tangential	Ø 24 m (452 m ²)

10.2022 Page 1 from 3





black EAN 4007841 006525 Article number 006525



Technical specifications

-20 – 50 °C			
Plastic			
220 – 240 V / 50 – 60 Hz			
2000 W			
8 pcs.			
Fluorescent lamps, electronic ballast1500 W			
500 VA			
Fluorescent lamps, series-corrected 900 VA			
400 VA			
2000 VA			


Switching zones	972 switching zones	
Twilight setting	2 – 1000 lx	
Time setting	5 s – 15 Min.	
Basic light level function	No	
Main light adjustable	No	
Twilight setting TEACH	No	
Constant-lighting control	No	
Interconnection	Yes	
Type of interconnection	Master/master	
Interconnection via	Cable	




IS 360-3 black EAN 4007841 006525 Article number 006525




Dimension Drawing

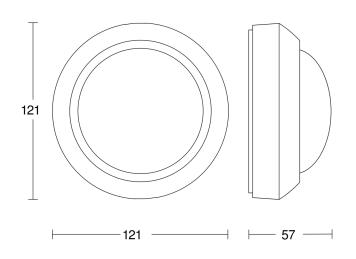


Light without neutral conductor

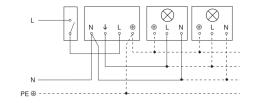

Light with neutral conductor



Connection using two-circuit switch for manual and automatic operation



Circuit diagram Connection via a changeover switch for continuous and automatic operation

