

DATA SHEET


Description	: Mercury Free Layer Built Extra Heavy Duty Battery		
Chemical System	: Carbon Zinc		
Nominal Voltage	: 9.0 Volts		
Nominal Dimensions	: 26.5 mm x 17.5 mm x 48.5 mm		
Terminals	: Standard snap fastener stud (+) and socket (-)		
Jacket	: Metal jacket		
Applications	: Electronic devices, multi meter, toys, remote controls.		
Average Weight	: 36g		

Cross References:


GP	JIS	IEC	Eveready
1604G	6F22	6F22	1222


Estimated Service:

Discharge Resistance	Discharge Condition	End Point Voltage	Service Life
620 Ohms	2 Hrs/ Day 7 Days/ Week	5.4V	29.0 Hrs
180 Ohms	30 Mins/ Day 7 Days/ Week	4.8V	8.0 Hrs

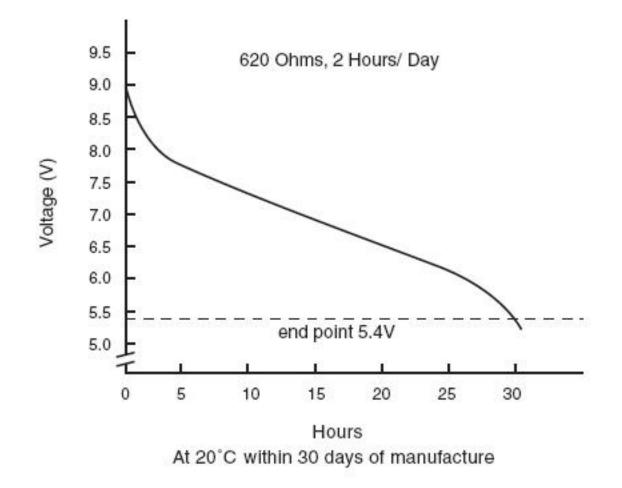

Model No.: GP1604G

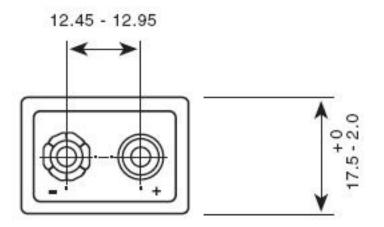

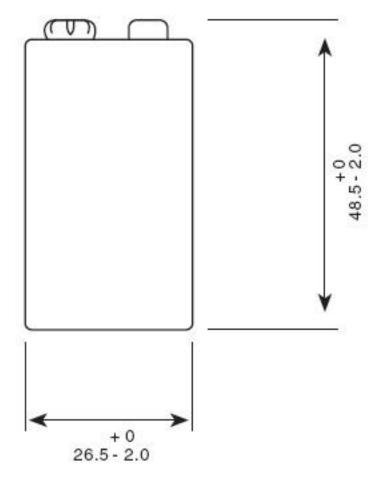

Unit: mm

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

www.gpbatteries.com