

panel mounting socket outlet - flange 114x114 fixing centers




Product description	
BALS-Prd.-Nr	12136
EAN	4024941121361
product category (PG)	panel mounting socket outle
current (A)	63A
number of poles (P99)	3p
number of poles (P)	2P+PE
position of earth contact (H)	9 h
voltage (V)	380 up to 415V

Product description	
frequency (HZ)	50 and 60Hz
protection degree (SA)	IP44
colour code 1 (KF1)	red RAL 3000
Colour of appliance	Hinged lid red RAL 3000, Enclosure grey RAL 7035
connection design (AT)	kontex contact
maximum conductor size (LQ)	25.0 qmm
cable entry (KE)	null
Height	119mm
Width	114mm
Depth	148mm
Flange size vertical	114mm
Flange size horizontal	114mm
Drill hole distance vertical	90mm
Drill hole distance horizontal	90mm
material of enclosure (GM)	PA6
contact	high temperature res., brass nickel plated

Additional technical information	
	angled 15°

Logistics data	
Weight/pcs	0.46 kg / Piece

Logistics data	
Packaging	Carton
Content amount	5 ST
EAN	4024941829830
Length	295 mm
Width	185 mm
Height	215 mm
Weight	2.461 kg
Volume	9,975 ccm

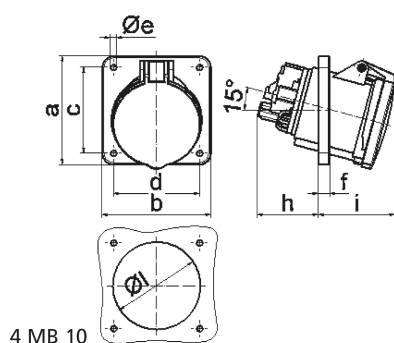

Ampere	63	63	63			
Polzahl	3	4	5			
a	114,0	114,0	114,0			
b	114,0	114,0	114,0			
c	90,0	90,0	90,0			
d	90,0	90,0	90,0			
e ø	6,5	6,5	6,5			
f	12,0	12,0	12,0			
h	65,0	65,0	65,0			
i	81,0	81,0	81,0			
l	92,0	92,0	92,0			
Leiter mm² min	6	6	6			
Leiter mm² max	25	25	25			