

HELAVIA® membrane grommets DG in black polychloroprene rubber




HELAVIA®



DG HELAVIA

Material: polychloroprene rubber
Colours: black - grey (near RAL 7037)
Temperature range: -30 to +90°C
Tensile strength at break: 7 MPa
Ultimate elongation: > 400 %
Dielectric strength: > 13 kV/mm
Applications : Designed to close off unused entries in panels, enclosures and housings of all types. Wires and conduits can pass through the membrane if required.

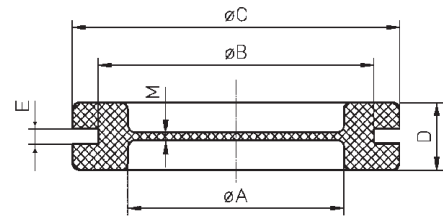

| type | art. no. | | dimensions (mm) | A | B | C | D | E | M |
|------|----------|------|-----------------|---|---|---|---|---|---|
| | black | grey | | | | | | | |
| | 010 | 013 | | | | | | | |

• Standard membrane (1 and 1,5 mm)

| | | | | | | | | | |
|----------------|---------------|---------------|-----|------|------|------|----|-----|-----|
| DG 9/E1 | 0258 0361 010 | - | 100 | 9 | 15,5 | 20 | 7 | 1 | 1 |
| DG 9 | 0258 0351 010 | 0258 0351 013 | 100 | 9 | 15,5 | 20 | 7 | 2 | 1 |
| DG 11 | 0258 0352 010 | 0258 0352 013 | 100 | 11 | 18,5 | 23 | 7 | 2 | 1 |
| DG 13,5 | 0258 0353 010 | 0258 0353 013 | 100 | 13,5 | 20,5 | 25 | 7 | 2 | 1 |
| DG 16 | 0258 0354 010 | 0258 0354 013 | 100 | 16 | 22,5 | 27,5 | 7 | 2 | 1 |
| DG 21 | 0258 0355 010 | 0258 0355 013 | 100 | 21 | 28 | 35 | 8 | 2 | 1 |
| DG 29 | 0258 0356 010 | - | 50 | 29 | 37 | 44 | 9 | 2 | 1 |
| DG 36 | 0258 0357 010 | - | 50 | 36 | 47 | 54 | 10 | 2,5 | 1 |
| DG 48 | 0258 0358 010 | - | 50 | 48 | 60 | 68 | 10 | 2,5 | 1 |
| DG 53 | 0258 0359 010 | - | 50 | 53 | 64 | 75 | 10 | 2,5 | 1,5 |
| DG 69 | 0258 0360 010 | - | 50 | 69 | 79 | 90 | 10 | 2,5 | 1,5 |
| DG M16 | 0258 0011 010 | - | 100 | 9 | 16 | 20 | 7 | 2 | 1 |
| DG M20 | 0258 0012 010 | 0258 0012 013 | 100 | 13,5 | 20 | 25 | 7 | 2 | 1 |
| DG M25 | 0258 0013 010 | 0258 0013 013 | 100 | 18,5 | 25 | 30,5 | 7 | 2 | 1 |
| DG M32 | 0258 0014 010 | 0258 0014 013 | 100 | 25 | 32 | 39 | 8 | 2 | 1 |
| DG M40 | 0258 0015 010 | - | 50 | 31 | 40 | 47 | 10 | 2,5 | 1 |
| DG M50 | 0258 0016 010 | - | 50 | 39 | 50 | 57 | 10 | 2,5 | 1 |
| DG M63 | 0258 0017 010 | - | 50 | 53 | 63 | 75 | 10 | 2,5 | 1 |
| DG M68 | 0258 0019 010 | - | 50 | 53 | 68 | 75 | 10 | 2,5 | 1,5 |
| DG M75 | 0258 0018 010 | - | 50 | 65 | 75 | 87 | 10 | 2,5 | 1 |



• Thick membrane

| | | | | | | | | | |
|-----------------|---------------|---|-----|----|------|------|----|---|---|
| DG 16/E3 | 0258 0449 010 | - | 100 | 16 | 22,5 | 27,5 | 8 | 3 | 2 |
| DG 16/E4 | 0258 0440 010 | - | 100 | 16 | 22,5 | 27,5 | 9 | 4 | 3 |
| DG 21/E4 | 0258 0441 010 | - | 100 | 21 | 28 | 35 | 10 | 4 | 3 |
| DG 29/E6 | 0258 0445 010 | - | 100 | 29 | 37 | 44 | 13 | 6 | 5 |
| DG 36/E3 | 0258 0362 010 | - | 100 | 36 | 47 | 54 | 12 | 3 | 3 |



• Cross-cut membrane

| | | | | | | | | | | Length hole |
|-----------------|---------------|---|-----|------|------|------|----|-----|-----|-------------|
| DGC 11 | 0258 0401 010 | - | 100 | 11 | 18,5 | 23 | 7 | 2 | 1 | 10 |
| DGC 13,5 | 0258 0402 010 | - | 100 | 13,5 | 20,5 | 25 | 7 | 2 | 1 | 10 |
| DGC 16 | 0258 0403 010 | - | 100 | 16 | 22,5 | 27,5 | 7 | 2 | 1 | 14 |
| DGC 21 | 0258 0404 010 | - | 100 | 21 | 28 | 35 | 8 | 2 | 1 | 17 |
| DGC 29 | 0258 0405 010 | - | 50 | 29 | 37 | 44 | 9 | 2 | 1 | 25 |
| DGC 36 | 0258 0406 010 | - | 50 | 36 | 47 | 54 | 10 | 2,5 | 1 | 32 |
| DGC 48 | 0258 0407 010 | - | 50 | 48 | 60 | 68 | 10 | 2,5 | 1 | 42 |
| DGC 53 | 0258 0408 010 | - | 50 | 53 | 64 | 75 | 10 | 2,5 | 1,5 | 25 |

