




Fourth pole  
GLX42  
AC

Product designation  
Product type designation  
Operating voltage type

**Contact characteristics**

IEC Conventional free air thermal current I <sub>th</sub>	A	315
Rated insulation voltage U <sub>i</sub> IEC/EN	V	1000
Rated impulse withstand voltage U <sub>imp</sub>	kV	12
Operating current I <sub>e</sub>		
AC21A	400V A	315
	500V A	315
	690V A	315
AC22A	400V A	315
	500V A	315
	690V A	315
AC23A	400V A	315
	500V A	250
	690V A	250

**Dimensions**

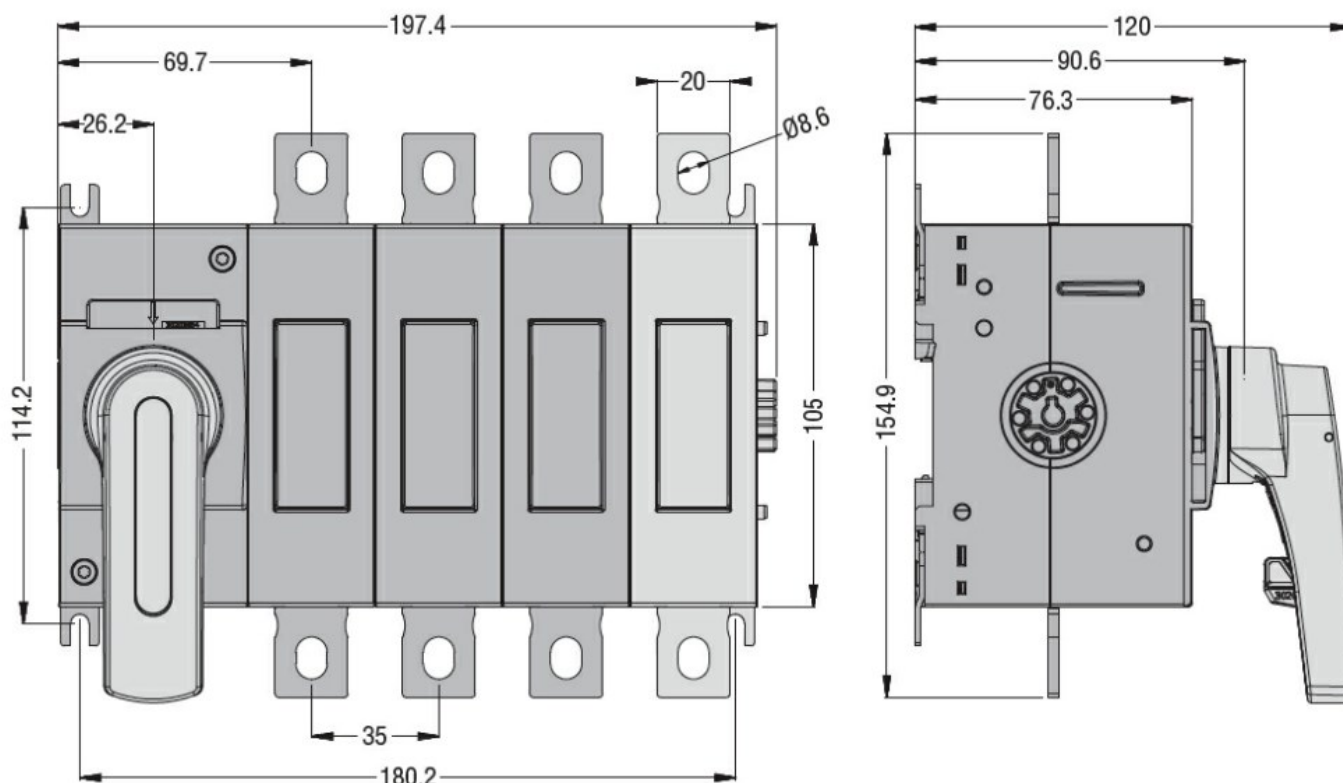

**Wiring diagrams**



### Certifications and compliance

#### Compliance

IEC/EN 60947-1

IEC/EN 60947-3

#### Certifications

EAC

### ETIM 6 classification

EC000066 - Power contactor, AC switching