


**QUALITY
TECHNOLOGY**

ENGINEERED IN SWITZERLAND

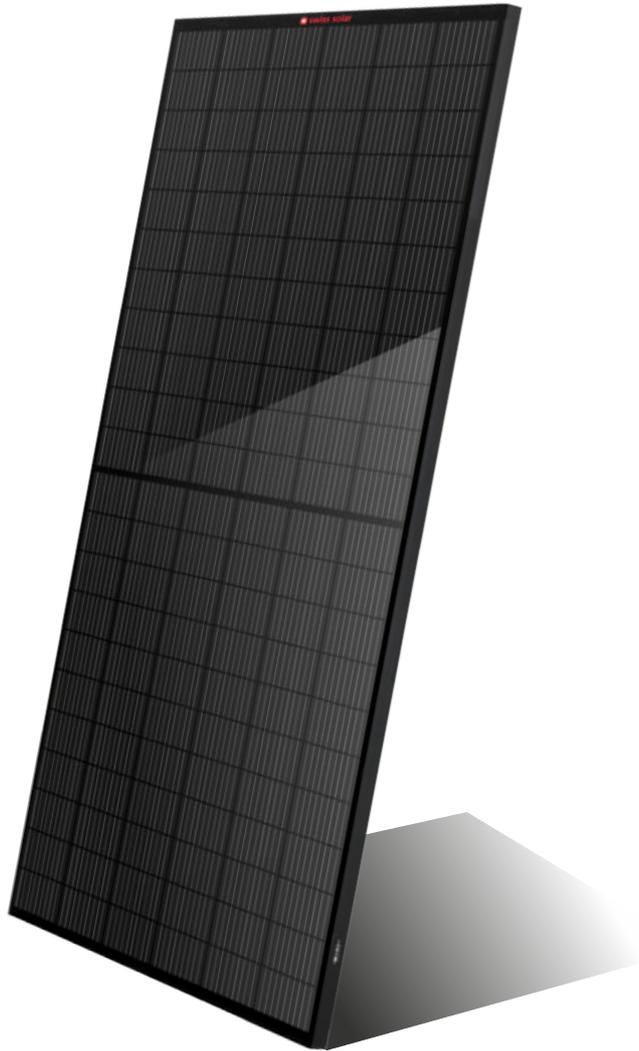

FULL BLACK

IBEX HIGH EFFICIENCY MONOCRYSTALLINE SOLAR MODULES WITH HALF CELL TECHNOLOGY

—

—

—

—

—

—

—

IBEX 132MHC-EiGER

MONOCRYSTALLINE SOLAR MODULE

FULL BLACK

ELECTRICAL DATA AT STC

Rated power P _{mpp} [Wp]	495	500
P _{mpp} range to	0/+5W	0/+5W
Rated current I _{mp} [A]	12.24A	12.31A
Rated voltage V _{mpp} [V]	40.44V	40.62V
Short-circuit current I _{sc} [A]	13.13A	13.20A
Open-circuit voltage U _{oc} [V]	48.67V	48.83V
Efficiency at STC up to	20.85%	21.06%
Application Class	Class A	Class A

ELECTRICAL DATA AT NOCT

Power at P _{mpp} [Wp]	373.00	377.00
Rated current I _{mp} [A]	10.01	10.05
Rated voltage V _{mpp} [V]	37.26	37.51
Short-circuit I _{sc} [A]	10.63	10.67
Open-circuit voltage U _{oc} [V]	45.44	45.69

LIMITING VALUES

Max. system voltage [V]	1500V DC (IEC)
Max. return current [I]	20A
Operating Temperature	- 40 to +85°C
Max.tested pressure load [Pa]2	5400
Max. tested tensile load [Pa]2	3800

SPECIFICATIONS

Number of cells	132 (6 x 22) 182x182 mm
Dimensions	2094x1134x35 mm
Weight	26.0 kg
Front-side glass	3.2 mm tempered Low Iron Glass
Frame	Stable, anodised aluminium frame, black
Junction box	Split Junction Box (IP68)
Cable	4 mm ² , +900mm,-900mm Cust.Length
Diodes	3 Diodes
Plug-in connection	MC4 Compatible
Hail test (max. hailstrom)	Ø45mm 23 m/s 83 km/h



TEMPERATURE COEFFICIENT

I _{sc}	V _{oc}	P _{max}
0.05% /°C	-0.28% /°C	-0.36% /°C

PACKING CONFIRGURATION

Container	40 HQ	Pieces Per Pallet	31
Pallets Per container	22	Pieces per Container	682

The specifications and average values can vary slightly. Relevant is the corresponding data of the individual measurement. Specifications are subject to change without notice. Measurement tolerance depending on equipment: rated power +/- 3%, other values +/- 10%. All information given in this data sheet corresponds to DIN EN 50380. A potential light-induced degradation of the power after commissioning is not considered here. Further information in the installation manuals. 1 The specific warranty conditions are given under www.swissenergy-solar.ch | 2 Horizontal mounted | 3 Tolerance L/W = +/- 3 mm. H +/-2mm, the dimensions given in the order confirmation will be decisive | 4 Location and dimensions of holes on request

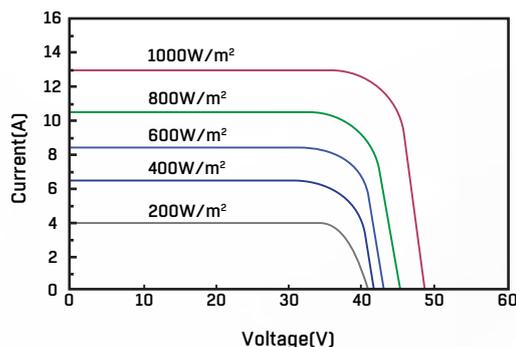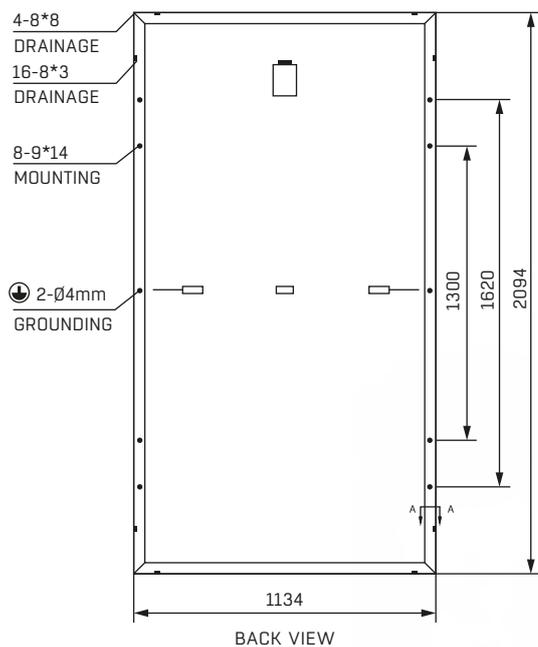

WARRANTY

20 YEARS
PRODUCT WARRANTY

30 YEARS
POWER WARRANTY