



## Multi-outlet extensions French-Belgian standard

Cat. No(s): 0 494 70/71/72/73/74/75/76/77/78/79/80/81/82/83/84  
 0 494 85/86/87/88/89/90/91/92/93/94/95/96/97/98/99

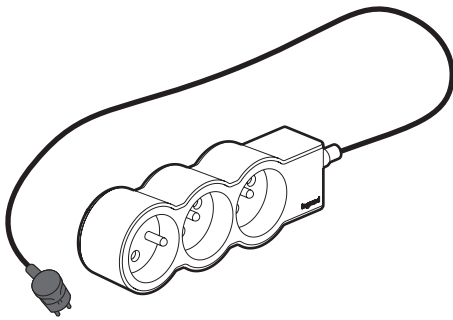

0 494 70/72/74



0 494 97


### 1. USE

Multi-outlet extensions: 3, 4, 5 and 6 x 2P+E flush sockets with shutter, with 2P+E plug, with or without a cord.  
 Socket units with recesses at a 45° angle (except for 1 at 90° for connecting a transformer).

### 2. RANGE

French-Belgian standard	Cable length 1.5 m 3 G 1 mm <sup>2</sup>			Cable length 1.5 m 3 G 1.5 mm <sup>2</sup>		Cable length 3 m 3 G 1.5 mm <sup>2</sup>		to be wired 1.5 mm <sup>2</sup> Cable length 30 m
	White/Light Grey	Black/Dark Grey	White/Light Blue	White/Light Grey	Black/Dark Grey	White/Light Grey	Black/Dark Grey	White/Light Grey
3 x 2P+E	0 494 70	0 494 72	0 494 74	0 494 71	0 494 73	0 494 88	0 494 89	0 494 96
4 x 2P+E	0 494 75	0 494 77	0 494 79	0 494 76	0 494 78	0 494 90	0 494 91	0 494 97
5 x 2P+E	0 494 80	0 494 82	-	0 494 81	0 494 83	0 494 92	0 494 93	0 494 98
6 x 2P+E	0 494 84	0 494 86	-	0 494 85	0 494 87	0 494 94	0 494 95	0 494 99

### 3. DIMENSIONS (mm)

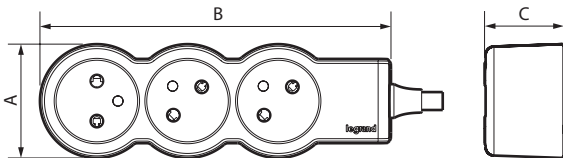

Cat. No(s)	A	B	C
3 x 2P+E	54	166.5	37.5
4 x 2P+E	54	209.5	37.5
5 x 2P+E	54	252.5	37.5
6 x 2P+E	54	295.5	37.5

### 4. CONNECTION

For catalogue numbers to be wired: 0 494 96/97/98/99

Terminal type: with screws  
 Terminal capacity: 3 x 1.5 mm<sup>2</sup>  
 Stripping length: 8 mm

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Mechanical characteristics

Impact tests: IK 04  
 Protection against solid bodies and liquids: IP 20

#### ■ 5.2 Material characteristics

Plastic  
 Matt White RAL 9003/Matt Light Grey RAL 7047  
 Black RAL 9017/Dark Grey RAL 7024  
 Matt White RAL 9003/Matt Light Blue (RAL 7020)

Halogen-free

UV-resistant

Self-extinguishing:

750°C/30 s for insulating components holding live parts in place.  
 650°C/30 s for other insulating components.

#### ■ 5.3 Electrical characteristics

Voltage: 230 V~

Frequency: 50 Hz

Current: 16 A

Power: max. 3680 W

#### ■ 5.4 Climate characteristics

Usage temperature: -5°C to +35°C

Storage temperature: -20°C to +70°C

## 6. CARE

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene..

**Caution:** Always test before using other special cleaning products.

## 7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards

See e. catalogue.