

LED outdoor light without sensor

L 40 C

without motion detector, with Bluetooth
EAN 4007841 085230
Article number 085230



LED

30 years (0 4,5h / day)



IP54

3000 K

3000K warm-white



connectable via bluetooth

10-100%

10 - 100% main light brightness



Settings via App



outdoor light



Control gear not exchangeable



Light source not exchangeable



plastic free packaging

Function description

Quality squared. Attractive and robust: the LED L 40 C wall light without sensor with high-quality, square aluminium housing and long-life STEINEL LED system with warm white 3000 K. Featuring soft light start, main light and neighbourhood group function. Conveniently set and network any number of Bluetooth Mesh lights via the app and using the new Bluetooth Mesh standard. Delivered in plastic-free packaging.

Technical specifications

Dimensions (L x W x H)	105 x 201 x 229 mm	Mains power supply	220 – 240 V / 50 – 60 Hz
With lamp	Yes, LED lamp	Output	12,9 W
Manufacturer's Warranty	3 years	Average rated life expectancy of power supply unit at 25°C	> 60000 h
Settings via	Smartphone, Tablet, Connect Bluetooth Mesh	Photo-cell controller	Yes
With remote control	No	Luminous flux total product	987 lm
Version	without motion detector, with Bluetooth	Measured luminous flux (360°)	987 lm
PU1, EAN	4007841085230	Colour temperature	3000 K
Application, place	Outdoors	Lamp	LED cannot be replaced
Application, room	outdoors, front door, all round the building, terrace / balcony	Service life LED L70B50 (25°)	> 60000 h
Colour	Anthracite	Base	without
includes sheet of self-adhesive numbers	No	LED cooling system	Passive Thermo Control
Installation site	wall	Soft light start	Yes
Impact resistance	IK03	Continuous light	selectable
IP-rating	IP54	Main light adjustable	0 - 100 %
		Twilight setting TEACH	Yes
		Interconnection	Yes

<https://www.steinel.de>

Subject to technical modifications

10.2023 Page 1 from 2

LED outdoor light without sensor

L 40 C

without motion detector, with Bluetooth
EAN 4007841 085230
Article number 085230




Technical specifications


Protection class	I
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, opal

Type of interconnection	Master/master, Master/slave
Interconnection via	Bluetooth Mesh Connect

Dimension Drawing

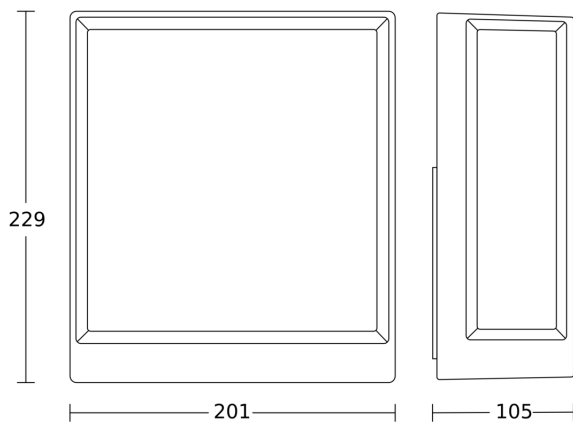

Circuit diagram Bluetooth



Circuit diagram Bluetooth

