

Model No.: **GP1604G**




NO MERCURY ADDED	
Description	: Mercury Free Layer Built Extra Heavy Duty Battery
Chemical System	: Carbon Zinc
Nominal Voltage	: 9.0 Volts
Nominal Dimensions	: 26.5 mm x 17.5 mm x 48.5 mm
Terminals	: Standard snap fastener stud (+) and socket (-)
Jacket	: Metal jacket
Applications	: Electronic devices, multi meter, toys, remote controls.
Average Weight	: 36g

Cross References:

GP	JIS	IEC	Eveready
1604G	6F22	6F22	1222

Estimated Service:

Discharge Resistance	Discharge Condition	End Point Voltage	Service Life
620 Ohms	2 Hrs/ Day 7 Days/ Week	5.4V	29.0 Hrs
180 Ohms	30 Mins/ Day 7 Days/ Week	4.8V	8.0 Hrs

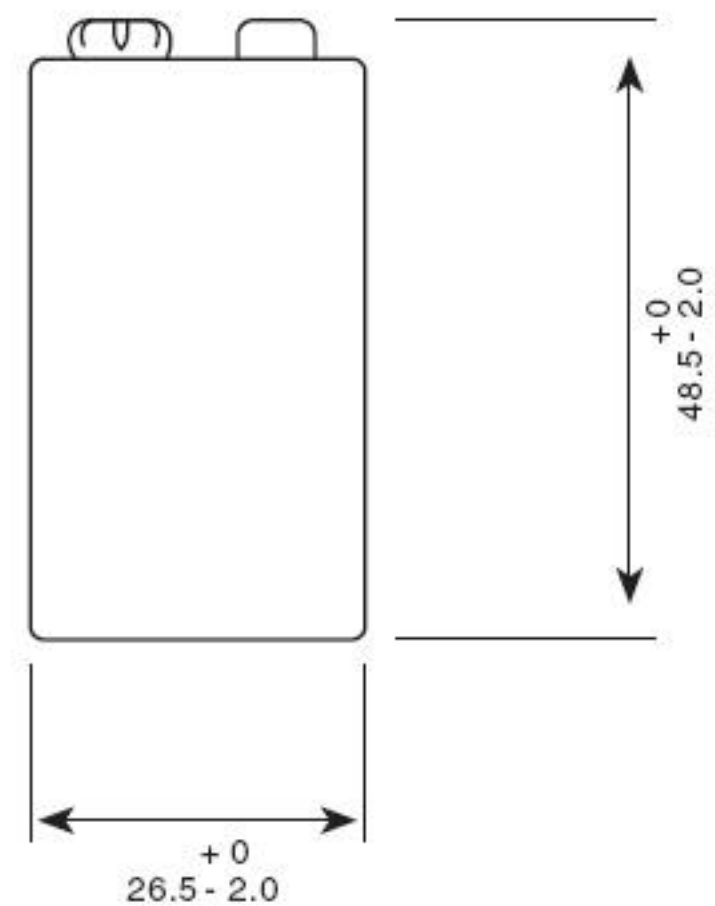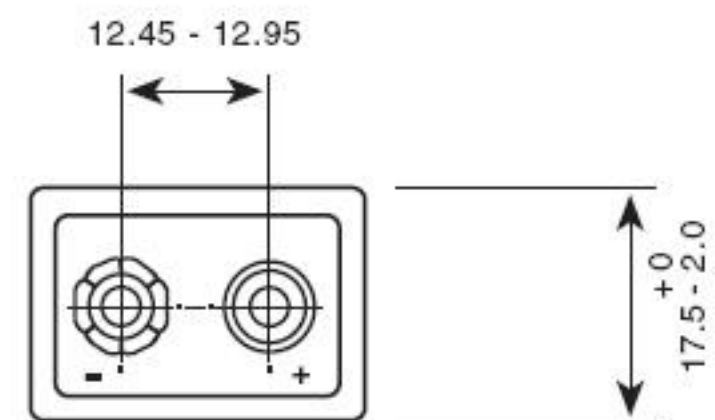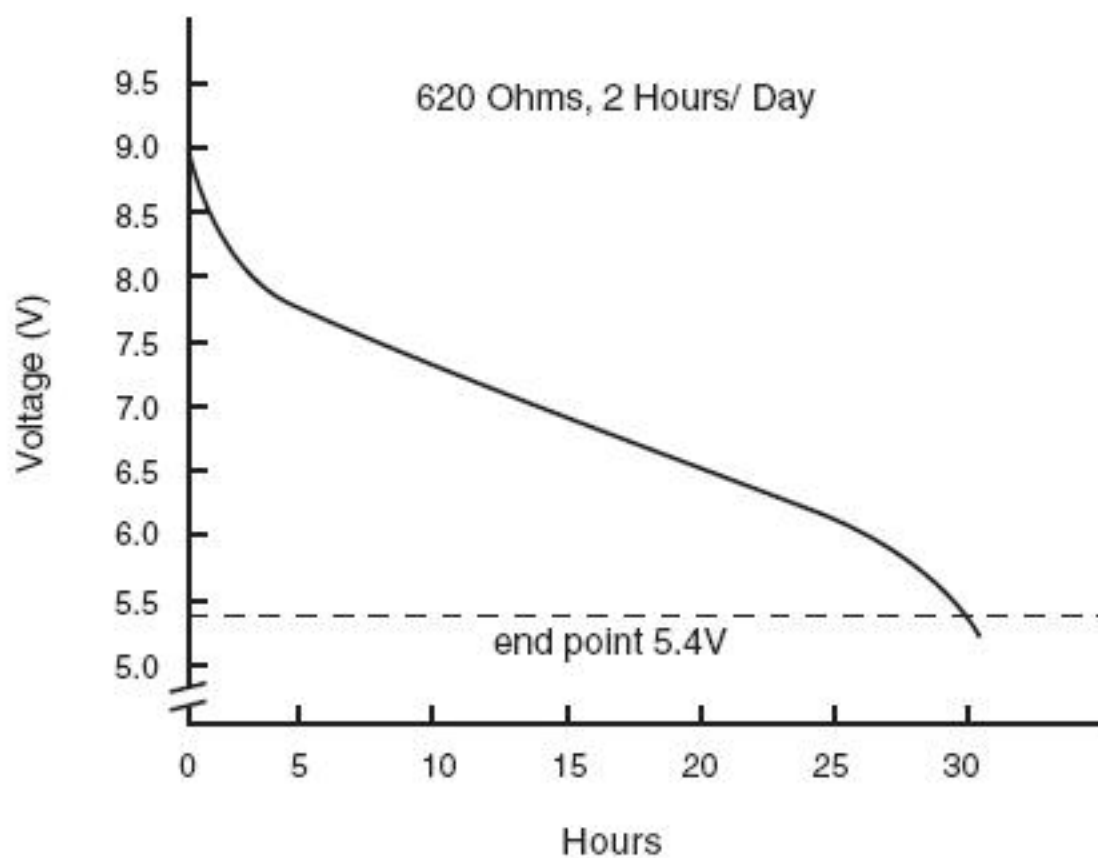

Unit : mm

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

www.gpbatteries.com

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.
Copyright © GPI International Ltd. - All rights reserved

Member
Gold Peak Group

05100110124